

# GRID FRAME HIGH BAY - 95WLED



407-478-3759  
www.ilp-inc.com

## RECESSED HIGH BAY

### FEATURES

- 2x2 Recessed Grid High Bay
- Specification Grade for New Construction or Renovation of any Building
- .040 Aluminum Prepainted Housing
- Standard Configuration
  - No Lens
  - No Wire Cage
- Frosted Lens Option Available
- Polycarbonate Len Option Available
- Wire Cage Option Available
- Flange Kit Option Available
- 0-10V Dimmable Driver\*
- 5 Year Warranty
- ETL Listed
- DesignLights Consortium® Qualified Luminaire

\*To Ensure Lead Wires Are Attached, "DIM" Call Out Is Required When Building Part Number



Without Frosted Lens



Frosted

### SUITABLE APPLICATIONS

- Gymsnasiums
- Multipurpose Romms
- Car Dealerships
- Racquetball Courts

LED SYSTEMS	Base	Frosted
Calculated L <sub>70</sub> (TM-21)	>100K	>100K
Delivered Lumens	11,806 lm	10,562 lm
Total Input Watts	96 W	96 W
Luminaire Efficacy Rating (LER)	123 lm/W	111 lm/W
Correlated Color Temperature (CCT)	5000K	5000K
Color Rendering Index (CRI)	>80	>80
Maximum Ambient Temperature	120°F	120°F
Universal Driver	120-277 V	120-277 V


\*LED System data above based on GH22-95WLED-UNIV-5000K & GH22-95WLED-UNIV-5000K-FRL

### ORDERING GUIDE:

Series	LED	Driver	Color	Options
<input type="checkbox"/> GH22 High Bay 2ft	<input type="checkbox"/> 95WLED	<input type="checkbox"/> UNIV120-277 Driver	<input type="checkbox"/> 5000	<input type="checkbox"/> SD480 480V Step Down Transformer <input type="checkbox"/> SD347 347V Step Down Transformer <input type="checkbox"/> DIM Dimming Leads Installed <input type="checkbox"/> FRL Frosted Acrylic Lens <input type="checkbox"/> PCL Polycarbonate Lens <input type="checkbox"/> FLGK Flange Kit <input type="checkbox"/> WC Wire Cage <input type="checkbox"/> G* Single Gasket <input type="checkbox"/> G2* Double Gasket <input type="checkbox"/> G3* Triple Gasket <input type="checkbox"/> HC Hurricane Clips <input type="checkbox"/> FI/ILBCP05 5W LED Factory Installed Battery Backup <input type="checkbox"/> FI/ILBCP07 7W LED Factory Installed Battery Backup <input type="checkbox"/> FI/ILBCP10 10W LED Factory Installed Battery Backup <input type="checkbox"/> FI/ILBCP12 12W LED Factory Installed Battery Backup

\*Does Not Make Fixture Wet Location or Dust Tight Rated

# GRID FRAME HIGH BAY - 95WLED

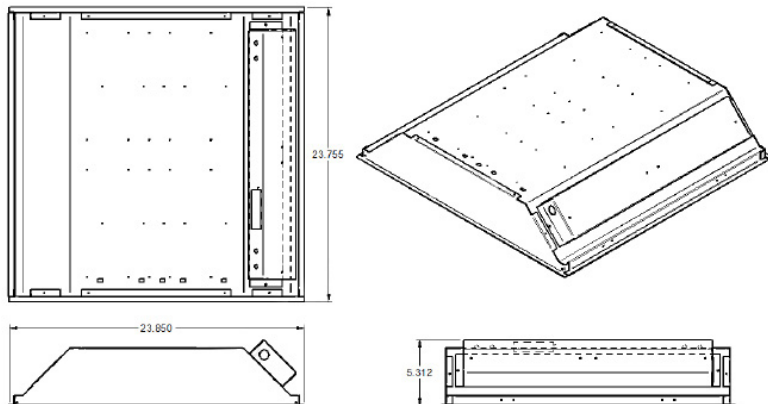


## GH22-95WLED-UNIV-5000K

### SUMMARY DATA

HEMISPHERES TESTED:	BOTH
EFFICIENCY (Total):	100.0 %
EFFICIENCY (Downlight):	100.0 %
EFFICIENCY (Uplight):	0.0 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION:	1.19
SPACING CRITERION:	1.24
LUMENS/LAMP:	10185.29
NO. OF LAMPS:	1
LUMINOUS OPENING: RECTANGULAR	
Width:	1.83 (Feet)
Length:	1.83
Height:	0.00
INPUT WATTS:	95.5014

### PLANE AND CONE DIAGRAM

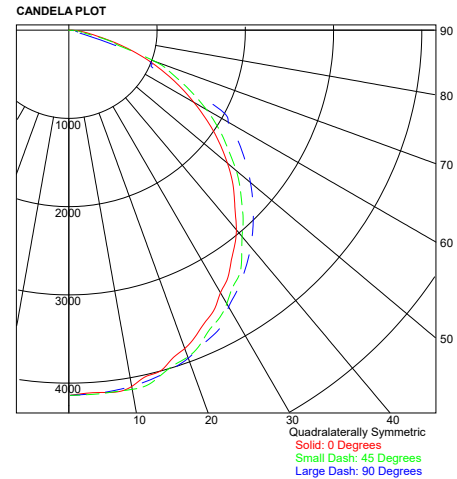


Photometric values based upon tests performed in compliance with LM-79. IES files can be downloaded at [www.ilp-inc.com](http://www.ilp-inc.com)

## GH22-95WLED-UNIV-5000K-FRL

### SUMMARY DATA

HEMISPHERES TESTED:	BOTH
EFFICIENCY (Total):	100.0 %
EFFICIENCY (Downlight):	100.0 %
EFFICIENCY (Uplight):	0.0 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION:	1.19
SPACING CRITERION:	1.24
LUMENS/LAMP:	10185.29
NO. OF LAMPS:	1
LUMINOUS OPENING: RECTANGULAR	
Width:	1.83 (Feet)
Length:	1.83
Height:	0.00
INPUT WATTS:	95.5014

### PLANE AND CONE DIAGRAM

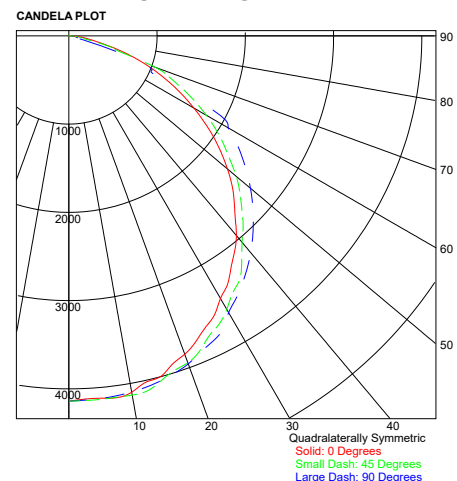

Photometric values based upon tests performed in compliance with LM-79. IES files can be downloaded at [www.ilp-inc.com](http://www.ilp-inc.com)