



LED CANOPY

INSTALLATION INSTRUCTIONS

⚠ CAUTION

THE LED CANOPY LIGHT MUST BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL CODES BY PERSONS FAMILIAR WITH THE INSTALLATION, OPERATION, AND/OR MAINTENANCE OF THE PRODUCTS AND THE HAZARDS INVOLVED. THE LED CANOPY LIGHT MUST BE INSTALLED WITH UL LISTED LIQUID-TIGHT CONDUIT FITTINGS.


⚠ WARNING

1. Risk of fire or electric shock.
2. Verify that supply voltage is correct comparing it with the luminaire label information.
3. Make sure the accessories and wires are complete and intact during the installation.
4. Installation requires knowledge of electrical systems. For install by qualified electrician only. Do not attempt installation if not qualified.
5. This fixture should only be installed in place of existing luminaires that have the construction features and dimensions specified in this manual.
6. Do not expose any wire to edge of sheet metal and/or other sharp objects that may cause damage or abrasion.
7. Do not change existing open holes or create any additional holes in the fixture or its components during installation.

⚠ WARNING

1. Turn OFF electrical power at fuse or circuit breaker box before and during installation and maintenance.
2. Do not use the LED Canopy Light near heating appliances/elements.
3. The input voltage and lamps should be matched after connecting the power line, please make sure the wiring section is insulated.
4. Suitable for WET Locations.
5. Operated within an ambient temperature range of -30°C(-22°F) and 40°C(104°F).
6. Not intended for use with emergency exits.

General Wiring Diagram

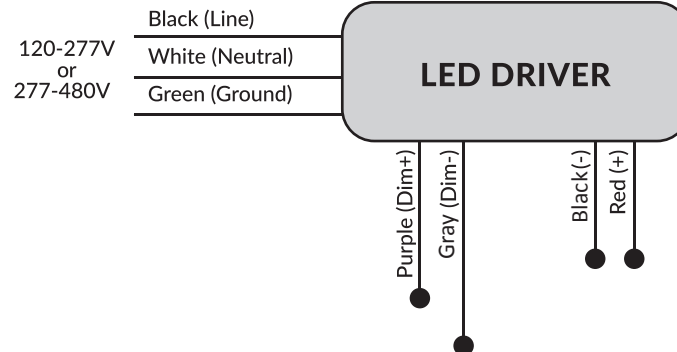

Installation Steps

TURN OFF POWER FROM MAIN CIRCUIT BREAKER

SURFACE MOUNTED INSTALLATION

- Unfasten the plate's screw to detach the mounting plate from the fixture (Figure 1).
- Use provided hardware (4 mounting screws) to fix mounting plate to embedded J-box (not provided) (Figure 2).
- Hang the fixture to mounting plate using mounting plate latch and fixture hook, and make appropriate electrical connections (Figure 3).
- Lift and Hook-up fixture on the mounting plate (Figure 4).
- Secure the fixture to the mounting plate by fastening back the plate's screw and installation is complete (Figure 5).




Figure 1




Figure 2




Figure 3




Figure 4




Figure 5



LED CANOPY

INSTALLATION INSTRUCTIONS

Installation Steps

PENDANT MOUNTED INSTALLATION

- Make appropriate electrical connection between fixture and power supply wires from 3/4" NPT pipe (not provided) (Figure 1).
- Screw-in the threaded end of the NPT pipe to the canopy fixture's thread, ensure that the installation is secure and installation is complete (Figure 2).




Figure 1




Figure 2

UNV 120-277V - Canopy 110° Optic	UNV with Microwave Sensor - Canopy 110° Optic	High Voltage 277-480V - Canopy 110° Optic	UNV 120-277V - Parking Garage 140° Optic	UNV with Microwave Sensor - Parking Garage 140° Optic	High Voltage 277-480V - Parking Garage 140° Optic
CP-5L-U-40	CP-5L-U-40-MWS	CP-5L-HV-40	CP-5L-U-40-PG	CP-5L-U-40-PG-MWS	CP-5L-HV-40-PG
CP-7L-U-40	CP-7L-U-40-MWS	CP-7L-HV-40	CP-7L-U-40-PG	CP-7L-U-40-PG-MWS	CP-7L-HV-40-PG
CP-9L-U-40	CP-9L-U-40-MWS	CP-9L-HV-40	CP-9L-U-40-PG	CP-9L-U-40-PG-MWS	CP-9L-HV-40-PG