



[SLIM
WALL PACK]





SLIM WALL PACK

The perfect solution for a broad range of outdoor lighting applications.

2L & 3L SMALL HOUSING PACKAGES 5L, 8L & 10L LARGE HOUSING PACKAGES

The Slim Wall Pack (SWP), is available from 2,400 to 10,500 lumens with an industry-leading high efficacy of 150lm/W. SWP provides greater than 85% in energy and maintenance savings over legacy HID systems. It is the ideal solution for new construction or replacing existing luminaires from 70W to 320W Metal Halide.

PIR MOTION SENSOR

Achieve code compliance with a fixed down PIR sensor with fully adjustable distribution aiming. Continuous Dimming, Motion and/or daylight harvesting, Fully adjustable high and low dimmed light levels, and Adjustable time delay and cutoff delay.


CCT SELECTABLE LED TECHNOLOGY

The Slim Wall Pack comes standard with field selectable 3000K, 4000K and 5000K LEDs. The integral CCT selector eliminates the need to stock multiple CCT luminaires, ensuring the SWP is equipped for every job site.



NEW! QUICK MOUNT BRACKET

New detachable Quick Mount Bracket prevents water intrusion! SWP's isolated optical chamber, no-thru bolt housing installation and poke-thru grommet provides exceptional ingress protection. Universal quick mount bracket enables effortless hands-free installation in minutes and is designed to attach to a multitude of surfaces.

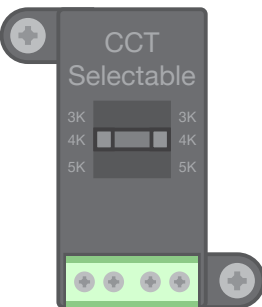

FIELD ADJUSTABLE OUTPUT

The Field Adjustable Output accessory allows for individual lumen and wattage output control at installation. The FAO's 7 selectable steps reduce lumen output by approximately 10% per step.



FEATURES TO NOTE



Sleek 3-PC low-profile Die-Cast Aluminum Housing

Deep box 10W Standard & Cold Temperature Battery Backup Options

90° adjustable Type IV distribution

Universal Quick Mount Bracket

Three 1/2" coin plugs on sides for conduit or electronic photocell

120-277V or 347-480V Drivers

0-10V Dimmable Driver to 10%

Optional Field Adjustable Output device (FAO) allows individual luminaire lumen output control

>70 Color Rendering Index (CRI)


L70 >100,000 hrs @ 25°C per TM-21-11

5 lumen packages delivering up to 150 lm/W


Field CCT Selectable 3000K, 4000K, & 5000K



Optional 3000K fixed full cutoff model provides International Dark Sky compliance

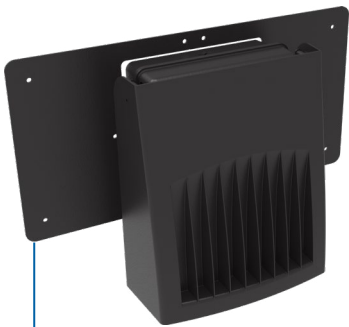

Optional Beauty Plate Available

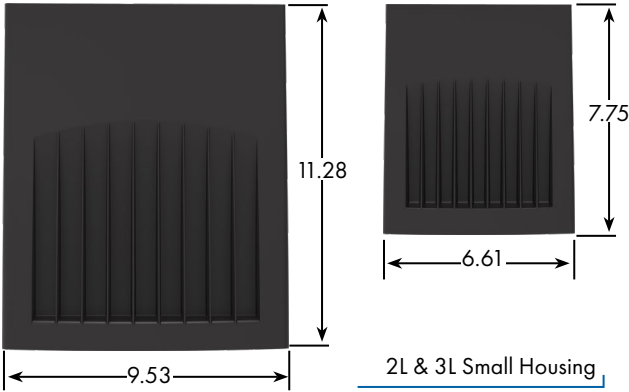

2L & 3L Small Housing

5L, 8L & 10L Large Housing Packages

LED SYSTEMS INFORMATION ¹	3000K		4000K		5000K		Watts ²	Replaces
	Part Numbers	Lumens	Efficacy	Lumens	Efficacy	Lumens		
SWP-2L-U-CCTS	2,465 lm	122 lm/W	2,649 lm	132 lm/W	2,493 lm	125 lm/W	20W	100W MH
SWP-3L-U-CCTS	3,160 lm	134 lm/W	3,310 lm	144 lm/W	3,226 lm	136 lm/W	23W	150W MH
SWP-5L-U-CCTS	5,396 lm	135 lm/W	5,669 lm	142 lm/W	5,515 lm	137 lm/W	40W	175W MH
SWP-8L-U-CCTS	8,254 lm	138 lm/W	8,678 lm	145 lm/W	8,455 lm	141 lm/W	60W	250W MH
SWP-10L-U-CCTS	10,141 lm	136 lm/W	10,581 lm	141 lm/W	10,335 lm	138 lm/W	75W	320W MH

¹ LED Chips are frequently updated therefore values are nominal
² Electrical data at 25°C (77°F). Actual wattage may differ by +/-10%.



*with FAO option





**“Your Number One Source
For Energy Efficient Lighting”**

WWW.ILP-INC.COM
407-478-3759
An ILLUMUS Brand