



OUTDOOR

Catalog



WHAT'S INSIDE

AREA LIGHTS

- 5 SELECTION GUIDE
- 6 SKYLINE AREA LIGHT
- 8 VIEWPOINT AREA LIGHT

FLOOD LIGHTS

- 11 SELECTION GUIDE
- 12 SKYLINE FLOOD LIGHT
- 14 VIEWPOINT FLOOD SERIES
- 16 CONVERTAFLOOD

WALL PACKS

- 19 SELECTION GUIDE
- 20 SKYLINE WALL MOUNT
- 21 FULL CUTOFF WALL PACK
- 22 SLIM WALL PACK
- 23 OW SERIES WALL PACK

CANOPY / PARKING GARAGE

- 25 SELECTION GUIDE
- 26 UFO PARKING GARAGE
- 28 SQUARE CANOPY & PARKING GARAGE



BOLLARDS

31 BOLLARDS

POLES

33 SQUARE STEEL POLES

34 ROUND STEEL POLES

35 BRACKETS





AREA LIGHTS

OUTDOOR

SELECTION GUIDE

SKYLINE AREA LIGHT (SAS/SAM)

VIEWPOINT AREA LIGHT (VAS/VAM)

SUITABLE APPLICATIONS

PARKING LOT	✓	✓
CAR DEALERSHIP	✓	✓
PARKING STRUCTURE	✓	✓
DISTRIBUTION CENTER	✓	✓
EDUCATION	✓	✓
PARKS	✓	✓
ROADWAYS	✓	✓
RETAIL	✓	✓
HOSPITALITY	✓	✓
HOSPITAL	✓	✓

FEATURES & PERFORMANCE

LUMEN PACKAGES	Small: 6L, 9L, 12L, 15L, 18L Medium: 24L, 30L, 36L, 42L	Small: 14L, 17L, 21L Medium: 21L, 24L, 28L or 33L, 37L, 42L
EFFICACY (lm/W) UP TO	165 LPW	165 LPW
ROTATABLE OPTICS	✓	✓
CCT OPTIONS	3K, 4K, 5K	4K, 5K
DISTRIBUTIONS	T2, T3, T4, T5S, FTA (Forward Throw Automotive), Flood - Medium, Wide, Very Wide + Back Light Control	T3, T4, T5
VOLTAGE	120-277V, 347-480V	120-277V, 347-480V
MOUNTING OPTIONS	Fixed Pole Mount, Adj. Pole Mount, Adj. Slip Fitter, Mast Arm, Fixed Wall Mount, Adj. Wall Mount, Trunnion + Round Poles	Adjustable Pole Mount & Adjustable Slip Fitter
FINISHES	Black, White, Silver, Bronze & Custom	Bronze Standard; Upcharge for Black, White, & Silver
DISTRIBUTION PERFORMANCE	Very High Spacing & Uniformity	Intermediate Spacing & Uniformity
SURGE PROTECTION	6kV Standard, Optional 10kV & 20kV	4kV Standard, Optional 10kV & 20kV
LIFE	L70>100k hours	L70>100k hours
AMBIENT RANGE	-40° to +50°C	-40° to +50°C
IP RATINGS	IP66	IP66
BAA COMPLIANT	✓	
DLC	Premium	Premium

BASIC CONTROLS

CONTROL RECEPTACLE	3-Pin or 7-Pin	3-Pin or 7-Pin
PHOTOCELL	Twist lock	Twist lock
FIELD ADJUSTABLE OUTPUT (FAO)	✓	
OCCUPANCY SENSOR	Field Adjustable Bluetooth Programmable Sensor	Field Adjustable Bluetooth Programmable Sensor

ADVANCE GROUPING CONTROLS

ENLIGHTED	Integral or via control receptacle	Via Control Receptacle Only
SYNAPSE	Integral or via control receptacle	Via Control Receptacle Only


SKYLINE AREA LIGHT

FEATURES


- Specification-grade diecast aluminum housing
- Powder coat finishes: bronze (BRZ), black (BLK), silver (SLV) and white (WHT)
- Custom color finishes available
- 5 Optical distributions with highest uniformity and application targeted performance in its class
- Factory rotatable type 2, 3, 4, 5 square, and automotive front row optics
- 9 Different optional mounting methods (3G rated)
- Single fastener hinged door driver access
- PIR occupancy, photocell, and bi-level dimming sensors available
- 3-Pin and 7-Pin ANSI C136.41 control receptacle options
- Calculated L80 >100,000 hours

HIGHEST UNIFORMITY IN ITS CLASS!

400W HID COMPETITOR VS. SKYLINE 18L



COMPETITOR



SKYLINE 18L



SUITABLE APPLICATIONS

- Parking Lots
- Car Dealerships
- Parking Structures
- Education
- Parks
- Distribution Centers
- Roadways
- Shopping Centers
- Warehouses

enlighted™
A Siemens Company

legrand®


synapse



LED SYSTEMS INFO

PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
SAS-6L-U-40-T4	6,532 lm	46W	142 lm/W	175W MH
SAS-9L-U-40-T4	9,332 lm	70W	133 lm/W	250W MH
SAS-12L-U-40-T4	12,301 lm	88W	139 lm/W	320W MH
SAS-15L-U-40-T4	15,219 lm	110W	138 lm/W	400W MH
SAS-18L-U-40-T4	18,341 lm	137W	134 lm/W	400W MH
SAM-24L-U-40-T4	23,370 lm	167W	134 lm/W	400W MH
SAM-30L-U-40-T4	28,918 lm	220W	131 lm/W	750W MH
SAM-36L-U-40-T4	34,329 lm	235W	146 lm/W	750W MH
SAM-42L-U-40-T4	39,430 lm	272W	145 lm/W	1000W MH

SKYLINE

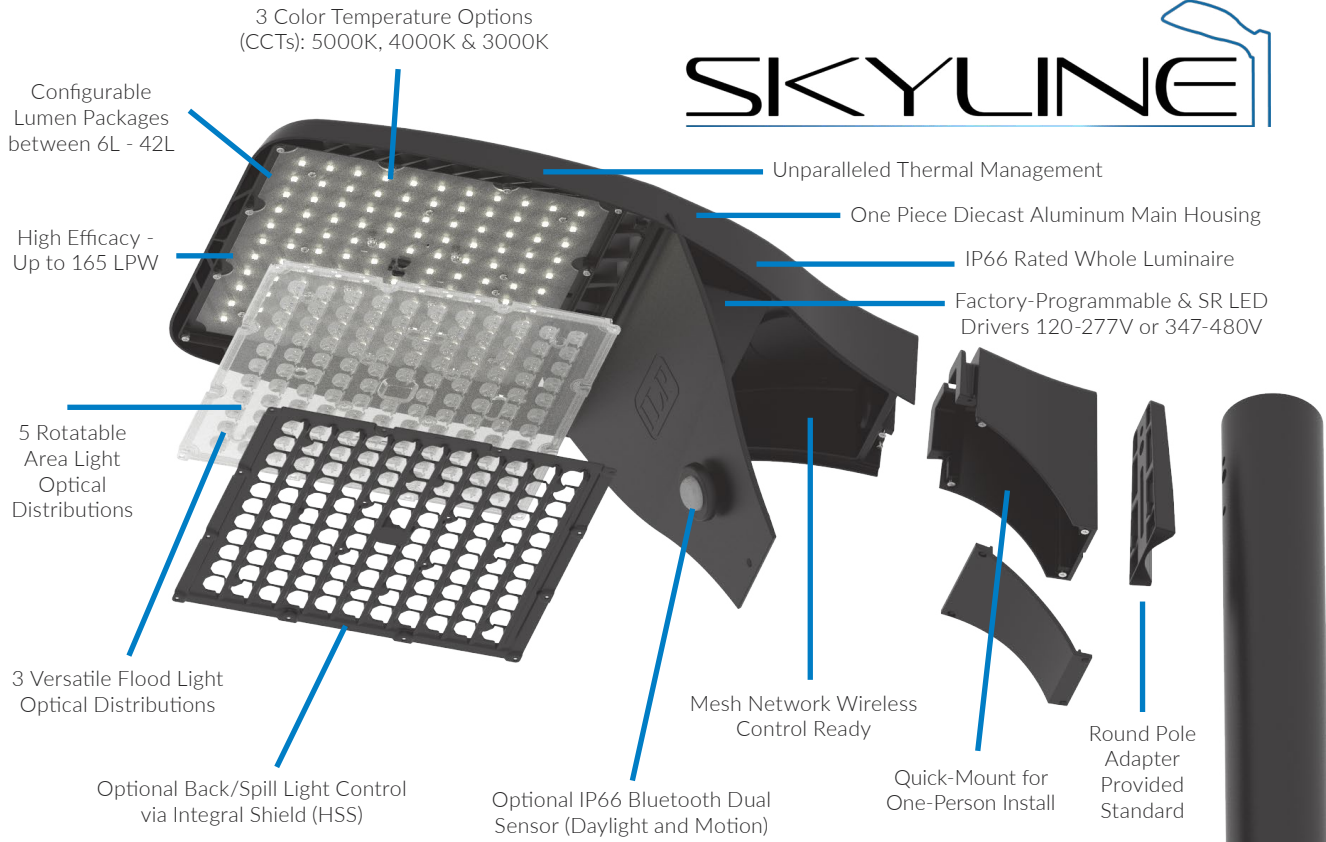

ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES		LUMENS	VOLTAGE	CCT	DISTRIBUTION	ORIENTATION	MOUNTING	FINISH
SAS	Small	6L 6,000 lm	U 120-277v	30 3000K	T2 T2 - Type 2	(BLANK) - Standard	SLPF Adjustable Slip Fitter	BRZ
		9L 9,000 lm	HV 347-480v	40 4000K	T3 T3 - Type 3	L Optics Rotated Left	UMB Universal Fixed	BLK
		12L 12,000 lm		50 5000K	T4 T4 - Type 4	R Optics Rotated Right	UMB/R Universal Mount Sqr/Rnd pole 3"-6"	WHT
		15L 15,000 lm			T5S Type 5 Square		UAB Universal Adjustable	SLV
		18L 18,000 lm			FTA Forward Throw Automotive		UAB/R Universal Adjustable Sqr/Rnd pole 3"-6"	
SAM	Med	24L 24,000 lm					WFM Wall Fixed Mount	
		30L 30,000 lm					WAM Wall Adjustable Mount	
		36L 36,000 lm					TRN Trunnion Mount	
		42L 42,000 lm					HTM Horizontal Tenon Mount	



For more helpful information

SCAN ME

Gain access to our flyer, brochure, IES files, and more by scanning the product's QR code.

VIEWPOINT AREA LIGHT

FEATURES

- One piece bronze diecast aluminum main housing
- Excellent application targeted performance
- Factory rotatable type 3, 4 and 5 optical distributions
- High efficacy - up to 165 LPW
- 3 and 7 pin control receptacle options
- Optional wireless controls integrated via 7 pin receptacle
- BLE PIR occupancy, photocell and bi-level
- Dimming sensor options
- 3G adjustable pole mount or slipfitter mounting options
- Lumen selectable - 3 positions per SKU
- 4000K and 5000K CCT
- -40°F to 104°F ambient temperature range
- Calculated L70 >100,000 Hours

viewpoint



SUITABLE APPLICATIONS

- Parking Lots
- Car Dealership
- Public & Municipal Park
- Roadways

LED SYSTEMS INFO

PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
VAS-14L-U-40-T4	16,254 lm	103W	154 lm/W	400W MH
VAS-17L-U-40-T4	18,276 lm	127W	145 lm/W	400W MH
VAS-21L-U-40-T4	21,373 lm	148W	145 lm/W	400W MH
VAM-21L-U-40-T4	22,818 lm	150W	155 lm/W	400W MH
VAM-24L-U-40-T4	25,233 lm	173W	148 lm/W	400W MH
VAM-28L-U-40-T4	28,699 lm	197W	148 lm/W	750W MH
VAM-33L-U-40-T4	36,569 lm	238W	153 lm/W	750W MH
VAM-37L-U-40-T4	38,395 lm	263W	146 lm/W	750W MH
VAM-42L-U-40-T4	41,258 lm	289W	143 lm/W	1000W MH

enlighted™
A Siemens Company

legrand®

synapse



ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	LUMENS	VOLTAGE	CCT	DISTRIBUTION	ORIENTATION	MOUNTING	FINISH
VAS	14L/17L/21L 14/17/21,000 lm selectable	U 120-277v	30 3000K	T3 Type 3	(BLANK) Standard	SLPF 2 3/8" Adjustable Slip Fitter	BRZ
		HV 347-480v	40 4000K	T4 Type 4	L Optics Rotated Left	PMB Adjustable Pole Mount	
			50 5000K	T5 Type 5	R Optics Rotated Right		
VAM	21L/24L/28L 21/24/28,000 lm selectable						
	33L/37L/42L 33/37/42,000 lm selectable						



For more helpful information

SCAN ME

Gain access to our flyer, brochure, IES files, and more by scanning the product's QR code.

NOTES



Visit us online at
ILP-INC.COM

If you have any questions regarding products in this section, please go online to ilp-inc.com or reach out to one of our sales reps for more information and pricing.



FLOOD LIGHTS

OUTDOOR

SELECTION GUIDE

ADVANCE GROUPING CONTROLS	BASIC CONTROLS	FEATURES & PERFORMANCE	SUITABLE APPLICATIONS	AREA LIGHTING
				LANDSCAPE
				FLAG POLE
				WALL WASH
				SIGNAGE
				ELEVATION ILLUMINATION
				CANOPY LIGHTING
				FACADE LIGHTING
				GENERAL PURPOSE
				PERIMETER SITE LIGHTING
				HOUSING SIZES
				LUMEN PACKAGES
				LPW (UP TO)
				LUMEN SELECTABLE
				CRI
				CCT OPTIONS
				DISTRIBUTIONS
				VOLTAGES
				MOUNTING
				SURGE PROTECTION
				LED LIFETIME
				AMBIENT RANGE
				RATINGS
				BAA COMPLIANT
				FINISHES
				DLC
				PHOTOCELL
				FAO (FIELD ADJUSTABLE OUTPUT)
				OCCUPANCY SENSOR
				ENLIGHTED
				SYNAPSE


SKYLINE FLOOD
(SFS/SFM)

VIEWPOINT FLOOD SERIES
(VFC/VFS/VFM/VFL/VFX)

CONVERTAFLOOD
(CFS/CFM)

✓	✓	
	✓	✓
		✓
	✓	✓
	✓	✓
	✓	✓
	✓	
	✓	✓
✓	✓	✓
✓	✓	
2	5	2
Small: 6L-18L Medium: 24L-42L	Compact: 2L Small: 5L-7L Medium: 10L-14L Large: 20L-30L Extra Large: 40L	Small: 4L Medium: 6L-10L
165 LPW	151 LPW	130 LPW
	4 Fixed Levels per Lumen Package	Rotary Knob Continuous Adjustability
>70	>70	>80
3K, 4K, 5K	3K, 4K, 5K, CCT Selectable	4K, 5K
Medium, Wide Forward Throw, Very Wide	Medium or Wide	3x3, 4x4, 5x5, 7x6
120-277V or 347-480V	120-277V or 347-480V	120-277V
Adjustable Pole Mount, Adjustable Slip Fitter, Adjustable Wall Mount, Trunnion	Knuckle, Knuckle with Tenon Adapter, Adjustable Slip Fitter, Pole Mount	Knuckle, Knuckle with Tenon Adapter, Trunnion
6kV	6kV (VFC 2.5kV)	2.5kV
L80 > 100K	L70 > 100K	L70 > 100K
-40 to +50°C	-40 to +50°C (VFL-30L +45°C)	-40 to +50°C
IP66	IP66	IP66
✓		
Bronze, Black, White, Silver & Custom Color	Bronze Standard; Upcharge for Black, White, & Silver	Bronze, Black, White
Premium	Premium	Standard & Premium
Electronic Pencil Photocell	Embedded Electronic Photocell	Embedded Electronic Photocell
Optional	✓	
Field Adjustable Bluetooth Programmable Sensor		
Integrated	Via Control Receptacle	
Integrated	Via Control Receptacle	

SKYLINE FLOOD LIGHT

FEATURES

- Specification-grade diecast aluminum housing
- Powder coat finishes: bronze (BRZ), black (BLK), silver (SLV) and white (WHT)
- Custom color finishes available
- High performance medium, wide, and very wide forward optic distributions
- Universal adjustable pole mount allows for 1 man installation on existing poles with no drilling required
- 5 different optional mounting methods (3G rated)
- Single fastener hinged door driver access
- 120–277V universal voltage or 347–480V high voltage
- PIR occupancy, photocell, and bi-level dimming sensors available
- 3-pin and 7-pin ANSI C136.41 control receptacle options
- Wireless control integrated luminaire
- Calculated L80 >100,000 hours



WHY SKYLINE?

The Skyline Flood light features a slim profile form cohesively matching to it's Area light counterpart with the addition of 4 adjustable tilt mounting methods and 3 optical distributions specifically designed for illuminating large areas. Designed for both new construction and retrofit, the Skyline provides a one-for-one solution for replacing legacy metal halide or high-pressure sodium luminaires while providing industry leading application targeted performance. Priced for a quick ROI, it's cost-effective diecast aluminum housings comes in 2-sizes and DLC Premium efficacies with up to 165 LPW, making it the best choice for low acquisition cost and high energy savings.

SUITABLE APPLICATIONS

- Parking Lots
- Education
- Distribution Warehouses
- Parking Structures
- Hospitals
- Shopping Centers
- Parks
- Car Dealerships



LED SYSTEMS INFO


PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
SFS-6L-VW	7,508 lm	46W	163 lm/W	175W MH
SFS-9L-VW	10,726 lm	70W	153 lm/W	250W MH
SFS-12-VW	14,231 lm	88W	161 lm/W	320W MH
SFS-15-VW	17,492 lm	110W	159 lm/W	400W MH
SFS-18-VW	21,080 lm	137W	154 lm/W	400W MH
SFS-24-VW	27,337 lm	167W	164 lm/W	400W MH
SFS-30-VW	33,237 lm	220W	151 lm/W	750W MH
SFS-36-VW	39,457 lm	235W	168 lm/W	750W MH
SFS-42-VW	45,319 lm	272W	167 lm/W	100W MH

FLOOD OPTIC PATTERNS


Skyline LED flood lights have a comprehensive offering of flood photometric distributions that provide superior illumination. Options include an innovative "wide forward throw" distribution that evenly illuminates large sites that rely on perimeter lighting, a "very wide" distribution for maximum coverage, and a "medium" distribution for highlighting specific objects or areas.



Medium



Wide Forward
Throw With 45° Tilt



Very Wide
With 45° Tilt

MOUNTING METHODS



UAB

Universal Adjustable Mount Bracket
(Round or Square Pole)



SLPF

2 3/8" Adjustable Slip
Fitter



WAM

Wall Adjustable Mount Bracket



TRN

Trunnion Mount

ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	LUMENS	VOLTAGE	CCT	DISTRIBUTION	MOUNTING	FINISH
SFS Small	6L 6,000 lm	U 120-277v	30 3000K	MD Medium	SLPF Adjustable Slip Fitter	BRZ
	9L 9,000 lm	HV 347-480v	40 4000K	WD Wide Forward	UAB Universal Adjustable	BLK
	12L 12,000 lm		50 5000K	VW Very Wide	UAB/R Universal Adjustable Sqr/Rnd pole 3"-6"	WHT
	15L 15,000 lm				WAM Wall Adjustable Mount	SLV
	18L 18,000 lm				TRN Trunnion Mount	
SFM Medium	24L 24,000 lm					
	30L 30,000 lm					
	36L 36,000 lm					
	42L 42,000 lm					



For more helpful information

SCAN ME

Gain access to our one pager, brochure and more by scanning the product's QR code.

VIEWPOINT FLOOD SERIES

FEATURES


- Low-profile diecast aluminum housings available in 5 sizes
- Bronze polyester powder coat finish (standard)
- Fully adjustable NEMA 7×6 distribution or optional NEMA 5×4
- Adjustable knuckle, trunnion, slip fitter, pole, and tenon adapter mounting options
- 3000K, 4000K and 5000K CCT selectable via integral window selector
- 4-level field adjustable output (FAO) allows individual luminaire lumen output control
- Embedded electronic photocell with override switch (standard)
- 120–277V universal voltage or 347V–480V high voltage
- Calculated L70 >100,000 hours



SUITABLE APPLICATIONS

- Landscape
- Flag Pole
- Wall Wash
- Signage
- Spot and Flood Light
- Elevation Illumination

INTEGRATED FEATURES



- Optional Twist Lock NEMA 3-PIN Photocontrol Receptacle (VFM - VFX)
- Lumen, & Photocell Quick Access Switches
- Electronic Photocell (120-277V)

WHY VIEWPOINT?

With its sleek, low-profile design, the Viewpoint Flood Series discretely enhances and blends into site surroundings, while providing industry-leading features and performance.



LED SYSTEMS INFO

PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
VFC-2L-U-CCTS-W	2,189 lm	16W	142 lm/W	70W MH
VFS-5L-U-CCTS-W	5,575 lm	42W	140 lm/W	100W MH
VFS-7L-U-CCTS-W	7,147 lm	54W	138 lm/W	150W MH
VFM-10L-U-CCTS-W	11,464 lm	83W	145 lm/W	175W MH
VFM-14L-U-CCTS-W	14,298 lm	107W	139 lm/W	250W MH
VFL-20L-U-40-W	20,525 lm	147W	140 lm/W	400W MH
VFL-30L-U-40-W	27,666 lm	196W	141 lm/W	750W MH
VFX-40L-U-40-W	43,981 lm	291W	152 lm/W	1000W MH


MOUNTING OPTIONS



TRN
Trunion
VFC, VFS, VFM (Standard),
VFL (Standard), VFX (Standard)



KNK
Knuckle
VFC (Standard), VFS (Standard)



PMB
Adjustable Pole
Mount
VFM, VFL, VFX



SLPF
2-3/8" Adjustable
Slip Fitter
VFM, VFL, VFX

ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	LUMENS	VOLTAGE	CCT	DISTRIBUTION	MOUNTING	FINISH
VFC Compact	2L 2,000 lm	U 120-277v	CCTS CCT Selectable 3K, 4K, 5K	W 7x6 Wide M 5x5 Medium	KNK 1/2" Knuckle Mount (Standard)	BRZ
					TRN Trunion Mount	BLK
					TR Knuckle with 2-3/8" vertical tenon adapter	WHT
VFS Small	5L 5,000 lm 7L 7,000 lm				KNK 1/2" Knuckle Mount (Standard)	SLV
					TRN Trunion Mount	
					TR Knuckle with 2-3/8" vertical tenon adapter	
VFM Medium	10L 10,000 lm 14L** 14,000 lm				KNK 1/2" Knuckle Mount	
					TRN Trunion Mount (Standard)	
					SLPF 2-3/8" Adjustable Slip Fitter	
VFL Large	20L 20,000 lm 30L 30,000 lm	U 120-277v HV 347-480v	40 4000K CCT 50 5000K CCT		PMB Pole Mount Bracket	
					TRN Trunion Mount (Standard)	
					SLPF 2-3/8" Adjustable Slip Fitter	
VFX X-Large	40L 40,000 lm				PMB Pole Mount Bracket	
					TRN Trunion Mount (Standard)	
					SLPF 2-3/8" Adjustable Slip Fitter	

**Available in high voltage 347-480V in dedicated 4K or 5K CCT. See cut sheet for more details.



For more helpful information
SCAN ME

Gain access to our brochure, IES files, and more by scanning the product's QR code.

CONVERTAFLOOD

FEATURES

- Architectural diecast aluminum housing
- Standard polyester powder coat finishes: bronze (BRZ), black (BLK), and white (WHT)
- Field swappable NEMA optical distributions:
 - CFS: NEMA 7x6 (standard), 5x5 and 4x4
 - CFM: NEMA 7x6 (standard), 5x5, 4x4, and 3x3
- Mounting:
 - ½" Knuckle (standard)
 - Trunnion mount bracket
 - 2 ¾" Tenon cap option
- Embedded electronic photocell (standard)
- Pushbutton convertible top provides toolless access:
 - Easily swap optics
 - Field adjustable output (FAO) allows individual luminaire lumen output control (standard)
 - Photocell override switch
- Vandal resistant latch via optional locking screw
- Hood distribution options available
- 120-277V Universal Voltage
- 4000K and 5000K CCT (standard)
- Calculated L70 >100,000 hours



Trunnion Mount Bracket

CFS



SUITABLE APPLICATIONS

- Landscape
- Signage
- Flag Pole
- Spot & Flood Light
- Wall Wash
- Elevation Illumination

LED SYSTEMS INFO

PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
CFS-36W-U-40	4,183 lm	35W	119 lm/W	150W MH
CFM-52W-U-40	6,285 lm	57W	111 lm/W	175W MH
CFM-85W-U-40	10,630 lm	85W	125 lm/W	250W MH

ORDERING GUIDE

*Options are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	WATT	DRIVER	COLOR	DISTRIBUTION	FINISH
CFS CF Series Small	36W	U 120-277V	50	N76/S 7x6 Optic (CFS)	BRZ Bronze
			40	N76/M 7x6 Optic (CFM)	WHT White
CFM CF Series Medium	52W				BLK Black
	85W				

DISTRIBUTION OPTIONS

N33/xxx	NEMA 3Hx3V Optics (xxx=M52 or M85)
N44/xxx	NEMA 4Hx4V Optics (xxx=M52 or M85)
N55/xxx	NEMA 5Hx5V Optics (xxx=M36, M52, or M85)

MOUNTING - FIELD INSTALLED

CF-TR/xxx	2 ¾" Tenon Adapter (xxx=fixture color)
CF-TM/xxx	Trunnion Mounting Bracket (xxx=fixture color)



For more helpful information

SCAN ME

Gain access to our flyer, cut sheets and more by scanning the product's QR code.

NOTES



Visit us online at

ILP-INC.COM

If you have any questions regarding products in this section, please go online to ilp-inc.com or reach out to one of our sales reps for more information and pricing.



WALL PACKS

OUTDOOR



SELECTION GUIDE

SKYLINE WALL MOUNT (SAS/SAM)

SUITABLE APPLICATIONS	PEDESTRIAN WALKWAYS	
	BUILDING ENTRANCES	
	MULTI-USE FACILITIES	✓
	PARKING LOTS	✓
	STORAGE FACILITIES	✓
	INSTITUTIONS	✓
	SCHOOLS	✓
	LOADING DOCKS	
	WAREHOUSES	✓
	SHOPPING CENTERS	✓
FEATURES & PERFORMANCE	HOUSING SIZES	2
	LUMEN PACKAGES	Small: 6L-18L Medium: 24L-42L
	LPW (UP TO)	165 LPW
	LUMEN SELECTABLE	No
	CRI	>70
	CCT OPTIONS	3K, 4K, 5K
	DISTRIBUTIONS	T2, T3, T4, FTA
	DISTRIBUTION PERFORMANCE	Excellent Uniformity and Targeted Performance
	IDA	✓
	VOLTAGES	120-277V or 347-480V
	MOUNTING	Bracket with No Through Drilling
	BATTERY BACKUP	
	SURGE PROTECTION	6kV
	LED LIFETIME	L80 > 100K
	AMBIENT RANGE	-40 to +50°C
	RATINGS	IP66
	BAA COMPLIANT	✓
	FINISHES	Bronze, Black, White, Silver & Custom
	DLC	Premium
ADVANCE GROUPING CONTROLS	PHOTOCELL	3/7 Pin Control Receptacle
	FAO (FIELD ADJUSTABLE OUTPUT)	7 -Levels
	OCCUPANCY SENSOR	Field Adjustable Bluetooth Programmable Sensor
	ENLIGHTED	Integrated or via control receptacle
	SYNAPSE	Integrated or via control receptacle



FULL CUTOFF WALL PACK (WPCS/WPCM)	SLIM WALL PACK (SWP)	OW SERIES WALL PACK (OWS, OWM, OWL)
✓	✓	✓
✓	✓	✓
✓	✓	✓
✓		
✓	✓	✓
✓		
✓	✓	✓
✓	✓	✓
✓	✓	✓
✓	✓	
2	2	3
Small: 3L-5L Medium: 3L-11L	Small: 2L-3L Medium: 5L-10L	Small: 1L-4L Medium: 3L-5L, Large: 5L-16L
146 LPW	150 LPW	147 LPW
No	Optional with FAO	✓
>70	>70	>70
3K, 4K, 5K	3K, 4K, 5K CCT Selectable	3K, 4K, 5K CCT Selectable
T2, T3, T4	T4	T4
Moderate Uniformity and Targeted Performance	Low Uniformity and Targeted Performance	Low Uniformity and Targeted Performance
✓	Optional with Hood	Optional
120-277V or 347-480V; Dual Driver	120-277V or 347-480V	120-277V or 347-480V
Drill Through Back Casting	Bracket with No Through Drilling	Drill Through Back Casting
Small: 5W, Medium: 5W-12W; 14W Cold Temp -20°F	Small: None Medium: 10W; 10W Cold Temp -20°F	Small: None, Medium: 5W-10W; 10W Cold Temp -20°F, Large: 5W-10W; 10W Cold Temp -20°F
4kV	2.5kV	6kV (2.5kV OWS)
L70 > 100K	L70 > 100K	L70 > 100K
-40 to +45°C	-40 to +40°C	-40 to +45°C
Wet Location	IP65	IP65
✓		
Bronze, Black, White, Silver & Custom	Bronze Standard; Upcharge for Black, White, & Silver	Bronze Standard; Upcharge for Black, White, & Silver (OWM/OWL)
Standard/Premium	Premium	Premium
Electronic Pencil Photocell	Electronic Pencil Photocell	Electronic Pencil Photocell
	7 -Levels	
Field Adjustable Bluetooth Programmable Sensor	Field Adjustable Bluetooth Programmable Sensor	External Field Adjustable Bluetooth Programmable Sensor
Integrated		
Integrated		

SKYLINE WALL MOUNT

FEATURES

- Specification-grade diecast aluminum housing
- Powder Coat Finishes: bronze (BRZ), black (BLK), silver (SLV) and white (WHT)
- Custom color finishes available
- Type 2, 3, 4 optical distributions with highest uniformity in their product class
- 3G fixed or adjustable quick wall mount allows for 1 man installation
- Single fastener hinged door driver access
- 120-277V universal voltage or 347-480V High Voltage
- PIR occupancy, photocell, and bi-level dimming sensors available
- 3-pin and 7-pin ANSI C136.41 control receptacle options
- Wireless control integrated luminaire
- 3000K, 4000K and 5000K CCT
- Calculated L80 >100,000 hours



SUITABLE APPLICATIONS

- Parking Lots
- Parking Structure
- Parks
- Education
- Hospitals
- Car Dealerships
- Roadways
- Shopping Centers

LED SYSTEMS INFO

PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
SAS-6L-40	6,876 lm	46W	150 lm/W	175W MH
SAS-9L-40	9,823 lm	70W	140 lm/W	250W MH
SAS-12L-40	12,948 lm	88W	147 lm/W	320W MH
SAS-15L-40	16,020 lm	110W	146 lm/W	400W MH
SAS-18L-40	19,306 lm	137W	141 lm/W	400W MH
SAS-24L-40	24,600 lm	167W	147 lm/W	400W MH
SAS-30L-40	30,440 lm	220W	138 lm/W	750W MH
SAS-36L-40	36,136 lm	235W	154 lm/W	750W MH
SAS-42L-40	41,505 lm	272W	153 lm/W	100W MH



ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

Series		LUMENS		VOLTAGE		CCT	DISTRIBUTION		MOUNTING		FINISH			
SAS	Small	6L	6,000 lm	15L	15,000 lm	U	120-277v	30	3000K	T2	T2 - Type 2	WFM	Wall Fixed Mount	BRZ
		9L	9,000 lm	18L	18,000 lm	HV	347-480v	40	4000K	T3	T3 - Type 3	WAM	Wall Adjustable Mount	BLK
		12L	12,000 lm					50	5000K	T4	T4 - Type 4			WHT
SAM	Med													SLV
		24L	24,000 lm	36L	36,000 lm									
		30L	30,000 lm	42L	42,000 lm									



For more helpful information

SCAN ME

Gain access to our flyer, IES files and more by scanning the product's QR code.

FULL CUTOFF WALL PACK

FEATURES

- Rugged diecast aluminum housing
- Factory select finishes: bronze (BRZ), black (BLK), silver (SLV), and white (WHT)
- Custom colors finishes available
- Type II, III, and IV optics available
- Cast-in template for mounting directly over a 4" recessed outlet box
- Side hinged full cutoff front frame
- 120-277V universal voltage; 347-480V High Voltage (HV WPCM only)
- Battery backup and cold weather battery options available
- PIR occupancy, photocell, and bi-level dimming sensors available
- Wireless control integrated luminaire
- 3000K, 4000K and 5000K CCT
- Calculated L70 >100,000 hours



enlightened™
A Siemens Company

legrand®

synapse



WALL PACKS
WPCS/WPCM

SUITABLE APPLICATIONS

- Pedestrian Walkways
- Storage Facilities
- Multi-use Facilities
- Industrial Facilities
- Parking Lots
- Institutions
- Building Entrances
- Schools
- Loading Docks

LED SYSTEMS INFO

PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
WPCS-28WLED-UNIV-40-T4	3,277 lm	29W	115 lm/W	175W MH
WPCS-44WLED-UNIV-40-T4	4,618 lm	42W	109 lm/W	250W MH
WPCM-28WLED-UNIV-40-T4	3,513 lm	27W	131 lm/W	175W MH
WPCM-44WLED-UNIV-40-T4	4,930 lm	40W	124 lm/W	250W MH
WPCM-75WLED-UNIV-40-T4	8,344 lm	74W	113 lm/W	400W MH
WPCM-105WLED-UNIV-40-T4	11,404 lm	105W	108 lm/W	400W MH

ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	WATTS	DRIVER	CCT	OPTIC	FINISH
WPCS Full Cutoff Wall Pack	28W	UNIV	120-277V	50	(BLANK) Bronze
	44W			40	BLK Black
				30	SLV Silver
WPCM Full Cutoff Wall Pack	28W	UNIV	120-277V		WHT White
	44W	HV	347-480V		
	75W	DD	Dual Driver		
	105W				



For more helpful information

SCAN ME

Gain access to further information by scanning the product's QR code.

SLIM WALL PACK

FEATURES

- Low-profile diecast aluminum housing
- Bronze polyester powder coat finish (standard)
- Custom and factory select colors available
- 90° adjustable type IV distribution or optional IDA fixed model
- Quick mount bracket standard for easy surface mount installation
- 120–277V universal voltage or 347V–480V high voltage
- Deep box 10W battery backup and cold weather battery options available
- Add optional field programmable bluetooth occupancy sensor
- Optional field adjustable output device (FAO) allows individual luminaire lumen output control
- 3000K, 4000K and 5000K CCT selectable via integral selector
- Calculated L70 >100,000 hours

SLIM
WALL PACK



SUITABLE APPLICATIONS

- Pedestrian Walkways
- Building Entrances
- Multi-use Facilities
- Industrial Facilities
- Parking Lots
- Storage Facilities
- Institutions
- Schools
- Loading Docks

LED SYSTEMS INFO

PART NUMBER	LUMENS*	WATTS	LM/W	REPLACES
SWP-2L-U-CCTS	2,649 lm	20W	139 lm/W	100W MH
SWP-3L-U-CCTS	3,310 lm	24W	145 lm/W	150W MH
SWP-5L-U-CCTS	5,669 lm	40W	147 lm/W	175W MH
SWP-8L-U-CCTS	8,678 lm	60W	150 lm/W	250W MH
SWP-10L-U-CCTS	10,581 lm	75W	147 lm/W	320W MH

*Based off 4000K Correlated Color Temperature (CCT) selected via integral selector



ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	LUMENS	DRIVER	CCT	FINISH
SWP Slim Wall Pack	2L 3L 5L 8L 10L	U 120-277vV HV 347-480V	CCTS Selectable CCT (5000K, 4000K, 3000K) 30	BRZ Bronze BLK Black WHT White SLV Silver



For more helpful information

SCAN ME

Gain access to our brochure, cut sheets, and more by scanning the product's QR code.

OW SERIES WALL PACK

FEATURES

- Rugged diecast aluminum housing
- Bronze polyester powder coat finish (standard)
- Non-cutoff type iv distribution
- Borosilicate glass refractor reduces glare and provides uniform distribution (OWM/OWL)
- Optional hood for semi-cutoff type IV distribution
- Impact-resistant frosted low glare prismatic polycarbonate lens with UV stabilizers (OWS)
- Built in base bubble level for easy installation
- 120-277V universal voltage or HV 347-480V (OWM/OWL)
- Battery backup and cold weather battery options available
- 4000K and 5000K CCT
- Calculated L70 >75,000 Hours



OW SERIES
WALL PACK

WALL PACKS
OWS/OWM/OWL

SUITABLE APPLICATIONS

- Pathways
- Building Entrances
- Vehicle Ramps
- Schools
- Tunnels
- Stairways
- Loading Docks
- Public Areas

LED SYSTEMS INFO

PART NUMBER	LUMENS (Max.)	WATTS (Max.)	LM/W	REPLACES
OWS-1L/2L/4L-U-CCTS-BRZ	4,018 lm	30W	128 lm/W	100W MH
OWM-3L/5L-U-CCTS-BRZ	5,294 lm	40W	137 lm/W	175W MH
OWL-5L/8L/10L-U-CCTS-BRZ	10,915 lm	80W	137 lm/W	320W MH
OWL-10L/13L/16L-U-CCTS-BRZ	16,033 lm	119W	137 lm/W	400W MH



ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	LUMENS	DRIVER	CCT	FINISH
OWS	1L/2L/4L	U 120-277V HV* 347-480V	CCTS Selectable CCT (5000K, 4000K, 3000K)	BRZ Bronze
OWM	3L/5L			
OWL	5L/8L/10L 10L/13L/16L	*Only available with OWM-OWL		



For more helpful information

SCAN ME

Gain access to our flyer, IES files and more by scanning the product's QR code.



CANOPY / PARKING GARAGE

OUTDOOR

SELECTION GUIDE



UFO PARKING GARAGE (UFO)

SQUARE CANOPY (CP)

SUITABLE APPLICATIONS

PARKING GARAGE	✓	✓
CANOPY	✓	✓
ENTRANCE WAY	✓	✓
LOW BAY	✓	
WALKWAYS	✓	✓
LOADING DOCKS	✓	✓
STAIRWAYS	✓	✓
CAR PORTS	✓	✓
BUILDING PERIMETER	✓	✓

FEATURES & PERFORMANCE

LUMEN PACKAGES	3L-9L	3L-9L
LPW (UP TO)	146 LPW	134 LPW
CRI	>80	>80
CCT OPTIONS	3K, 4K, 5K	4K, 5K
DISTRIBUTIONS	Wide & Narrow (Low Bay)	Wide & Medium
UPLIGHT (UP TO)	10% Standard	3% Standard
VOLTAGES	120-277V or 347-480V	120-277V or 347-480V
HOUSING	Round	Square
LENSING	Diffuse Polycarbonate	Diffuse Medium or Parking Garage Wide Polycarbonate Lenses
MOUNTING	Quick Surface Mount, Pendant, Trunnion	Quick Surface Mount, Pendant
BIRD CONE SHIELD	✓	
BATTERY BACKUP	5W-16W; 14W Cold Temp -4°F	Remote Box 5W-12W; 14W Cold Temp -4°F
SURGE PROTECTION	6kV	2.5kV
LED LIFETIME	L70 > 100K	L70 > 50K
AMBIENT RANGE	-40 to +50°C	-40 to +40°C
RATINGS	IP66	IP65
BAA COMPLIANT	✓	
FINISHES	Bronze, Black, White, Silver	Bronze or White Standard
DLC	Standard & Premium	Premium

BASIC CONTROLS

PHOTOCELL	Electronic Pencil Photocell	Electronic Pencil Photocell
OCCUPANCY SENSOR	Field Adjustable Bluetooth Programmable Sensor	Microwave or Drop Nipple Field Adjustable Bluetooth Programmable Sensor

ADVANCE GROUPING CONTROLS

ENLIGHTED	Integrated	
SYNAPSE	Integrated	

UFO PARKING GARAGE

FEATURES

- Low-profile diecast aluminum housing
- Factory select finishes: bronze (BRZ), black (BLK), silver (SLV), and white(WHT)
- Custom colors finishes available
- Frosted polycarbonate lens reduces pixelation, glare, and distraction for drivers and pedestrians
- T5 wide distribution standard; optional T5 narrow low bay optic (LB) (concentrated distribution for atrium or exit/egress applications)
- Up to 10% uplight standard eliminates cave effect
- Mounting: quick surface mount bracket (standard), ½" pendant (standard), or optional trunnion mount bracket
- 120–277V universal voltage or 347–480V high voltage
- Battery backup and cold weather battery options available
- PIR Occupancy, photocell and bi-level dimming sensors available
- Wireless control integrated luminaire
- 3000K, 4000K and 5000K CCT
- Calculated L70 >100,000 hours



WHY UFO?

The UFO LED Parking Garage Luminaire was designed to interweave visual comfort, performance, and energy efficiency together in a unique industry aesthetic. The UFO's low-glare illumination features curved high-density LED chips coupled with diffuse lenses to minimize pixelation while delivering excellent layout performance. With up to 10% dedicated up-light standard, the UFO reduces the contrast between the luminaire and the ceiling eliminating the "cave" effect without any expensive additional modules. The purpose built UFO is suited for both new construction and retrofit applications providing up to 85% in energy savings compared to legacy metal halide luminaires.

SUITABLE APPLICATIONS

- Parking Garage
- Building Perimeter/ Security Lighting
- Entrances
- Low Bay
- Stairways
- Walkways
- Loading Docks
- Car Ports




LED SYSTEMS INFO


PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
UFO-28WLED	3,450 lm	27 W	124 lm/W	150W MH
UFO-40WLED	4,985 lm	40 W	118 lm/W	150W MH
UFO-58WLED	7,135 lm	57 W	125 lm/W	175W MH
UFO-75WLED	9,266 lm	76 W	121 lm/W	250W MH
UFO-28WLED-LB	3,819 lm	27W	144 lm/W	150W MH
UFO-40WLED-LB	5,567 lm	40 W	139 lm/W	150W MH
UFO-58WLED-LB	7,260 lm	57 W	126 lm/W	175W MH
UFO-75WLED-LB	9,482 lm	76 W	124 lm/W	250W MH

DISTRIBUTIONS

Proper Parking Garage Illumination requires scalability and presents particular distribution challenges, the UFO is the missing piece of that complex puzzle meeting the most specific application requirements. Available in two distribution types, the T5 Wide distribution is ideal for both center of drive lane and sides of drive lane applications, while the T5 Narrow concentrated distribution is ideal for high mounting, atrium, or exit/egress applications.

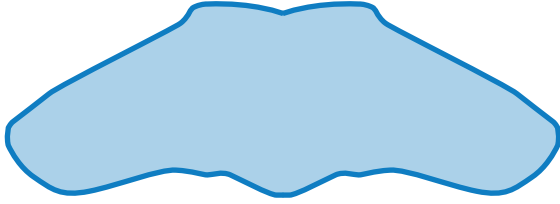

WIDE

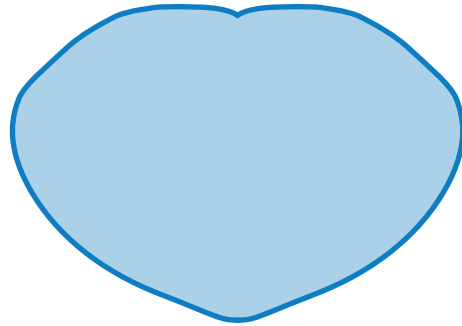


NARROW

MOUNTING OPTIONS

- Quick Mount Bracket - Standard base of installation when surface mounting to either the ceiling or junction box
- Pendant - ½" threaded pendant can be mounted through ½" coin plug on top of fixture (Supplied by other)
- TB - Trunion Mount Bracket



Quick Mount Bracket

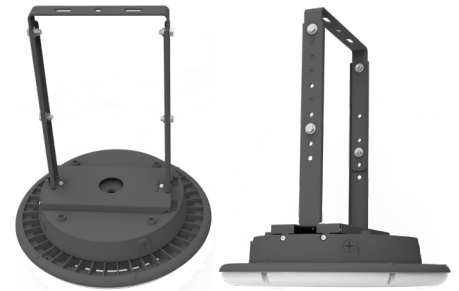

Trunion Mount Bracket

ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	WATTS	DRIVER	CCT	DISTRIBUTION	MOUNTING	FINISH
UFO UFO Parking Garage	28WLED	UNIV	120-277V	50	(BLANK) - Wide	(BLANK) Surface Mount
	40WLED	HV	347-480V	40	LB - Narrow	PEN5 60" leads for Pendant Mounting
	58WLED			30	SCON Side Conduit	SLV Silver
	75WLED				TRN Trunion	WHT White



For more helpful information

SCAN ME

Gain access to our installation instructions, cut sheets and more by scanning the product's QR code.

SQUARE CANOPY & PARKING GARAGE

FEATURES

- Rugged low-profile diecast aluminum housing
- Factory select finishes: bronze (BRZ) or white (WHT)
- UV stabilized and impact resistant polycarbonate lenses
- Up to 3% uplight eliminates cave effect
- Quick mounting plate with hook on feature allow for easy installation
- Three 1/2" coin plugs on sides for conduit or photocell
- 4000K and 5000K CCT
- 120-277V universal voltage or 347-480V high voltage
- Optional microwave sensor for 360° occupancy detection
- Optional universal pencil photocell



SUITABLE APPLICATIONS

- Walkways
- Building Perimeter/ Security Lighting
- Loading Docks
- Entrances
- Stairways
- Car Ports
- Parking Garages

LED SYSTEMS INFO

PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
CP-3L-U-40	3,477 lm	28W	122 lm/W	100W MH
CP-5L-U-40	5,090 lm	40W	126 lm/W	150W MH
CP-7L-U-40	7,328 lm	59W	125 lm/W	175W MH
CP-9L-U-40	8,192 lm	66W	124 lm/W	250W MH
CP-3L-U-40-PG	3,779 lm	28W	135 lm/W	100W MH
CP-5L-U-40-PG	5,093 lm	39W	130 lm/W	150W MH
CP-7L-U-40-PG	7,602 lm	59W	129 lm/W	175W MH
CP-9L-U-40-PG	8,455 lm	65W	130 lm/W	250W MH

ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	LUMENS	DRIVER	CCT	LENS	FINISH
CP Square Canopy & Parking Garage	3L 5L 7L 9L	U 120-277V HV 347-480V	50 40	(BLANK) Diffuse Medium PG Parking Garage Wide	(BLANK) Bronze WHT White



For more helpful information

SCAN ME

Gain access to our flyer, cut sheets, and more by scanning the product's QR code.

NOTES



Visit us online at

ILP-INC.COM

If you have any questions regarding products in this section, please go online to ilp-inc.com or reach out to one of our sales reps for more information and pricing.



BOLLARDS

OUTDOOR

BOLLARDS

FEATURES

- Flat top or dome top design with aluminum cone reflector
- 42" extruded aluminum housing with flush mounting base and vandal-resistant screws, optional cut down
- Powder coat finish over a chromate conversion coating, available in black, white, silver or bronze
- Custom color options available
- Stainless steel housing available for domed top only (SS)
- Internal ballast tray for easy maintenance
- Clear polycarbonate lens
- Multiple beam spread options: 90°, 180° and 270°
- 8" anchor bolts (standard), optional 4", 12" and 15"
- 120-277V universal voltage
- 5 Year warranty
- ETL listed for wet locations



BOLLARDS
BLDT/BLFT

SUITABLE APPLICATIONS

- Walkways
- Boardwalks
- Parking Lots

LED SYSTEMS INFO

PART NUMBER	LUMENS	WATTS	LM/W	REPLACES
BLFT-15WLED-UNIV-4000K	1,402 lm	17W	83 lm/W	70W MH
BLDT-15WLED-UNIV-4000K	1,221 lm	16W	74 lm/W	70W MH

ORDERING GUIDE


*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	WATTS	DRIVER	COLOR	FINISH
BLFT Flat Top Bollard	15WLED	UNIV 120-277V Driver	4000K	(BLANK) Bronze
BLDT Dome Top Bollard				BLK Black
				SLV Silver
				WHT White
				SS Stainless Steel



For more helpful information
SCAN ME

Gain access to further information by scanning the product's QR code.

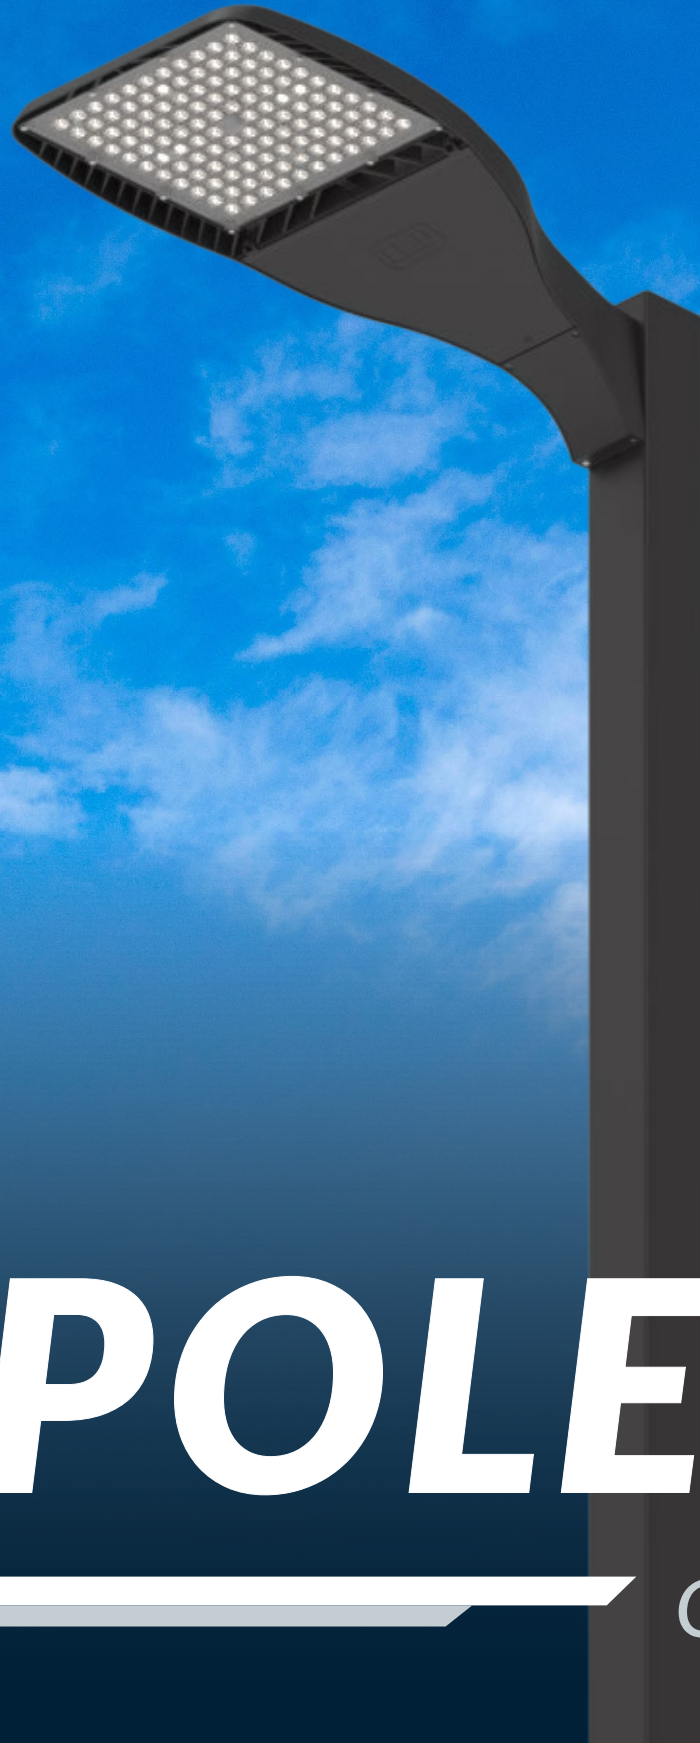



POLES

OUTDOOR

SQUARE STEEL POLES

FEATURES

- Straight 4", 5", or 6" square steel poles
- Shaft – 55,000 p.s.i minimum yield
- Two-piece base covers included
- Base plates – 36,000 p.s.i. minimum yield
- Reinforced handholes with grounding lug and removable cover
- Top tenon or drill pattern with removable pole cap
- Four galvanized anchor bolts with galvanized hardware Included
- Anchor bolt templates included
- Pre-ship anchor bolts with template – prepay freight and add
- Pole vibration dampeners available upon request

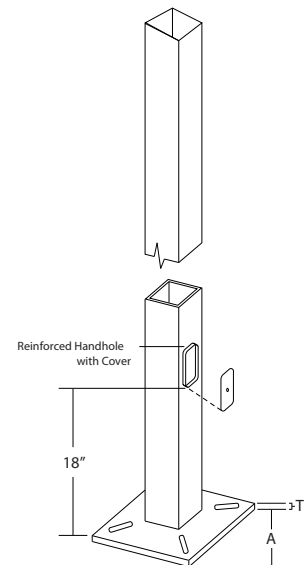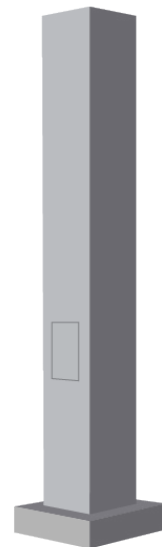

POLES
SS POLES

POLE DRILLING TEMPLATES

DRILL LEGEND						
-1	Single Fixture Drill Pattern			-3T	Three Fixture Drill Pattern	
-2	Two Fixtures at 180° Drill Pattern					
-2L	Two Fixtures at 90° Drill Pattern			-4	Four Fixtures Drill Pattern	

ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	POLE TYPE	SIZE (in)	HEIGHT (ft)			GAUGE	DRILL PATTERN	DRILL LEGEND OR TENON	FINISH
ILPOLE	SS	4	10	20	30	11	SKY = SKYLINE	1	BRZ
	Straight	5	11	21	31	7	VWP = VIEWPOINT	2	BLK
	Square	6	12	22	32			2L	SLV
			13	23	33			3T	WHT
			14	24	34			4	CC
			15	25	35			TN2	
			16	26	36				
			17	27	37				
			18	28	38				
			19	29	39				



For more helpful information

SCAN ME

Gain access to our product cut sheet and more by scanning the product's QR code.

ROUND STEEL POLES

FEATURES

- Straight 3", 4", 4.5", or 5" round steel poles
- Shaft – 42,000 p.s.i minimum yield
- Two-piece base covers included
- Reinforced handholes with grounding lug and removable cover
- Top tenon or drill pattern with removable pole cap
- Four galvanized anchor bolts with galvanized hardware Included
- Anchor bolt templates included
- Pre-ship anchor bolts with template – prepay freight and add
- Pole vibration dampeners available upon request



POLE DRILLING TEMPLATES

DRILL LEGEND

-1	Single Fixture Drill Pattern		-3T	Three Fixture Drill Pattern	
-2	Two Fixtures at 180° Drill Pattern				
-2L	Two Fixtures at 90° Drill Pattern		-4	Four Fixtures Drill Pattern	

ORDERING GUIDE

*Options & Accessories are not shown. Please see the cut sheet on our website at ilp-inc.com or scan the QR code below.

SERIES	POLE TYPE	SIZE (in)	HEIGHT (ft)			GAUGE	DRILL PATTERN	DRILL LEGEND OR TENON	FINISH
ILPOLE	SR	3	10	20	30	11	SKY=Skyline	1	BRZ
	(Straight	4	11	21			VWP=Viewpoint	2	BLK
	Round)	4.5	12	22				2L	SLV
		5	13	23				3T	WHT
			14	24				4	
			15	25				TN2	
			16	26					
			17	27					
			18	28					
			19	29					




For more helpful information

SCAN ME

Gain access to our product cut sheet and more by scanning the product's QR code.

BRACKETS

SIDE TENON
BRACKETS



WALL MOUNT
BRACKETS



ROUND POLE
ADAPTERS



SPOKE BRACKETS



BULLHORN BRACKETS



WOODPOLE BRACKETS



SQUARE POLE
ADAPTERS



ROUND SQUARE
ROUND BRACKETS



POST TOP TENON ADAPTERS



For more helpful information

SCAN ME

Gain access to our product cut sheet and more by scanning the product's QR code.

Published March 2022



*"YOUR NUMBER ONE SOURCE
FOR ENERGY EFFICIENT LIGHTING"*

WWW.ILP-INC.COM | 407-478-3759
An ILLUMUS Brand

