



ARCHITECTURAL ILLUMINATION SIMPLIFIED


OUTDOOR CYLINDERS

unify



Surface Mount

Wall Mount

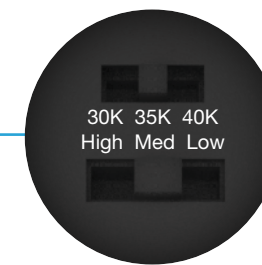

CCT Switch
3000K / 3500K / 4000K

Power Switch
High / Med / Low



Photocell Switch
OFF / ON

CCT Switch
3000K / 3500K / 4000K

Power Switch
High / Med / Low

Fully Embedded Settings

3 CCTs In One with CCT Selectable Technology



Select the perfect CCT to complement your space. Adjust it on-site to create the desired ambiance and highlight textures or architectural features.


3 Lumens In One with Lumen Selectable Technology



Choose from a total lumen range of 600 to 3500 lumens to customize your space. Achieve the ideal light output by optimizing the settings. The up and down lumens are evenly distributed at a 50/50 ratio.

Integrated Photocell on Wall Mounted Series

Seamlessly integrated into the wall bracket for a superior aesthetic. Equipped with a standard override switch for added convenience.

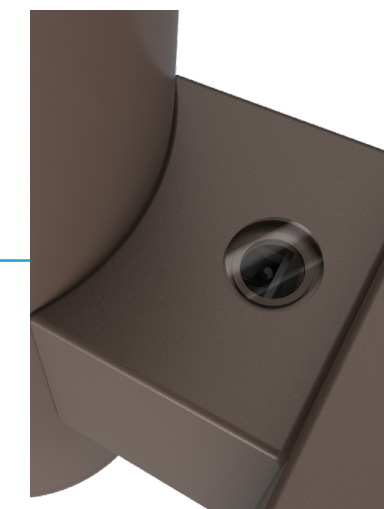

Integrated Photocell Sensor

OUTDOOR ILLUMINATION SIMPLIFIED

A versatile wall-mounted direct-indirect cylinder that simplifies specification by integrating all settings and the photocell into a single SKU, while providing clean and precise up-and-down beams.



Direct-Indirect Illumination Simplified

The unique Unify design combines both indirect and direct light sources within a compact cylinder profile, delivering clean beams for both types of illumination. The product can be configured for direct-indirect, direct-only, or indirect-only lighting to perfectly meet the specific needs of the space.



3 Available Sizes for Surface & Wall Mount



Standard Bronze Finish with Customized Options



4 Different Beam Options

Benefit from a selection of 4 beam angles 15°, 25°, 40° & 60°. Illuminate your wall or floor with clean beams and excellent cutoff and glare light control.



Spot 15°



Narrow 25°




Medium 40°



Wide 60°


Build for Durability and Reliability in Challenging Outdoor Environments

Unify is designed to work in a wide ambient temperature range (-40°C to +40°C) with an IP65 rating, ensuring durability and reliability in challenging outdoor environments.



OUTDOOR CYLINDERS

unify

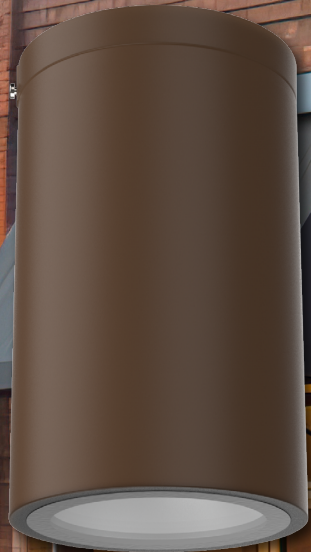

Surface
Mount



Wall
Mount

