

Narrow Linear Vapor Tight





VVT2.0

The new fully sealed and gasketed, wet-location rated VVT 2.0 luminaires are the ideal low entry cost solution to allow customers to quickly hit their financial payback thresholds. It's NSF and IP65 rated toolless access polycarbonate enclosure is easy to service and clean, ideal for variety of applications including food and beverage processing. With 2', 4', and 8' housings, lumen and CCT selectability, and high standard efficacy, the VVT 2.0 is easy to stock, install, and save energy.

SUITABLE APPLICATIONS

- Coolers & Freezers













- Food & Beverage Prep Locker Rooms Outdoor Walkways Garage

• Industrial









KEY FEATURES

- Impact-resistant, 5VA flame-rated polycarbonate housing provides longevity and durability.
- IP65 rated for reliable performance in wet or outdoor conditions.
- Selectable lumen options for adjustable brightness to fit any space.
- Switchable color temperatures (3500K/4000K/5000K) for lighting flexibility.
- High energy efficiency with up to 159 lm/W and 0-10V dimming to save on costs.
- NSF International certified for NSF/ANSI Standard 2 Food Equipment.
- Wireless sensor integration and versatile mounting options for easy setup.


CONTROLS OPTION

Microwave Sensor Option:

- Special photocell to measure and differentiate natural light from LED light from behind the fixture lens
- User defined Tri-level dimming control based upon occupancy (also known as corridor function)
- One-key commissioning via programmable remote control
- One-touch daylight learning via remote control



FEATURES

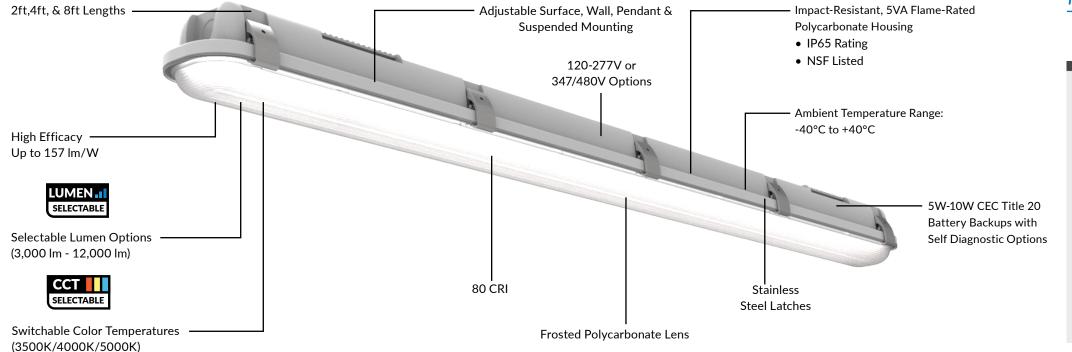

MOUNTING OPTIONS

Surface









45° Angle Wall Mount