




SWP ADJUSTABLE SLIM WALL PACK INVERTED MOUNTING INSTALLATION INSTRUCTION ADDENDUM

APPLICABLE TO ALL SWP MODELS

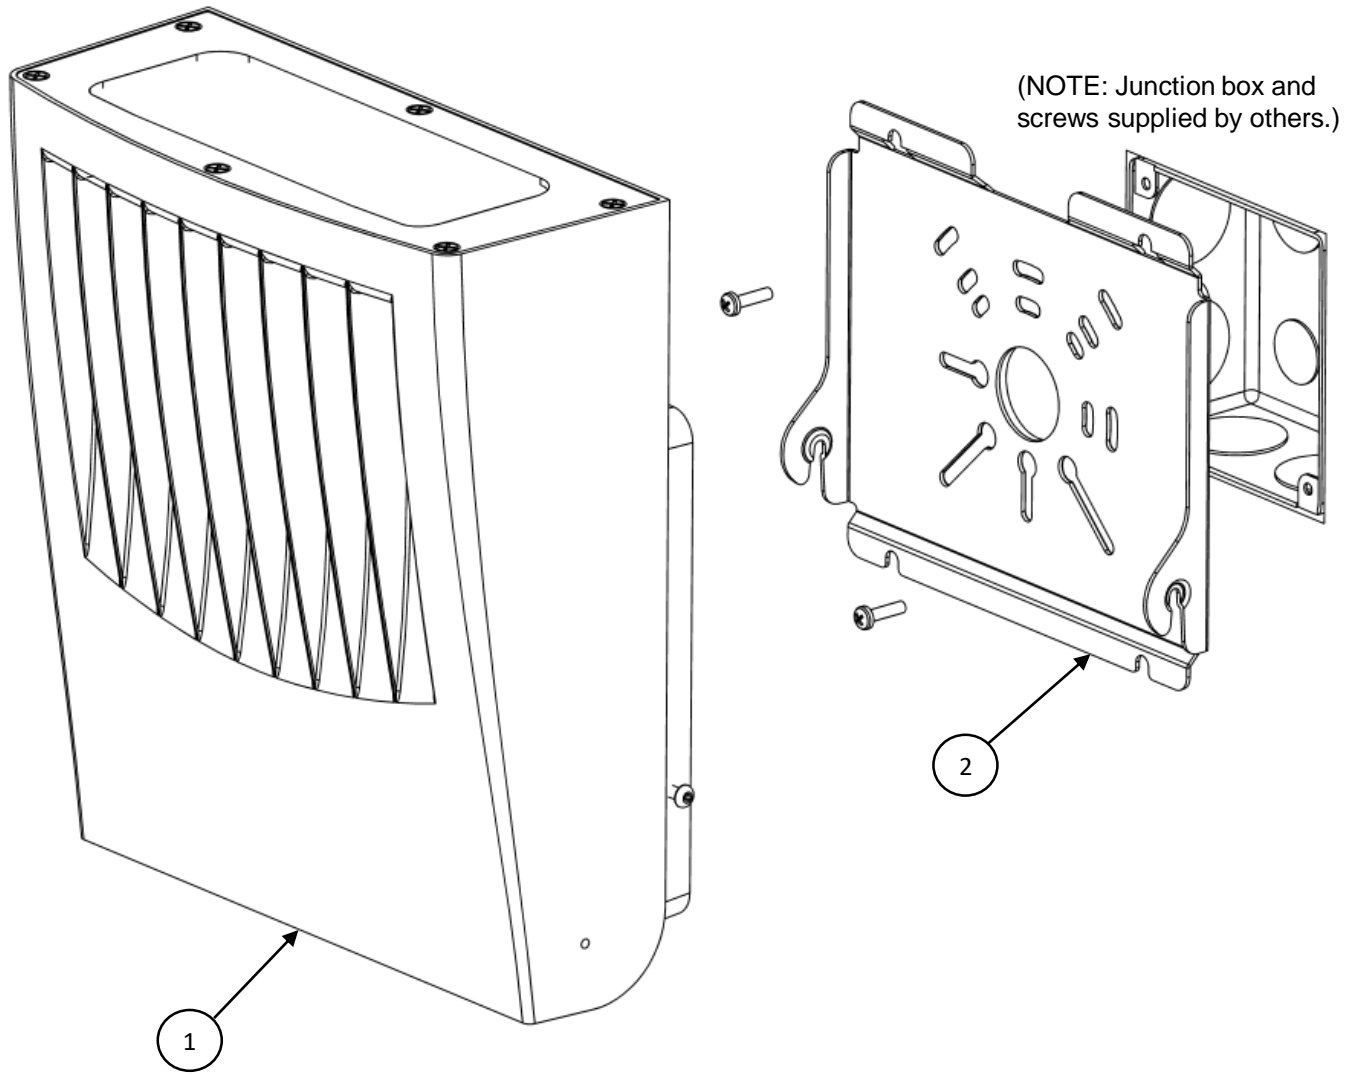

PARTS LIST		
Tag	Qty	Description
1	1	SWP LED Wall Pack Fixture
2	1	SWP Mounting Plate (supplied with Item 1)



SWP ADJUSTABLE SLIM WALL PACK INVERTED MOUNTING INSTALLATION INSTRUCTION ADDENDUM

CAUTION:

BE SURE TO READ COMPLETELY THROUGH THE INSTRUCTIONS SUPPLIED WITH THE SWP FIXTURE AS WELL AS THIS DOCUMENT PRIOR TO INSTALLATION.
RISK OF SHOCK.

TOOLS REQUIRED:

Drill and drill bit as required
3/32 Hex Key
#2 Philips Screwdriver
Silicone Caulk, outdoor-rated

INSTALLATION INSTRUCTIONS:

- Open the SWP fixture housing and punch or drill out the holes required for your mounting surface and hardware. In this example, a 4" Square Wall Mounted Junction Box is shown.
- Pull the building wires through the center hole of the SWP Mounting Plate (Item 2) and then attach the plate to the junction box securely.
- Open the fixture using a #2 Philips screwdriver and connect building wires to the fixture as shown in the standard Installation Instructions provided with the SWP Fixture.
- Slide the SWP Fixture into the Mounting Plate and lock in position using a 3/32" Hex Key as shown below.
- Apply a generous and complete bead of Silicone Caulk around the perimeter of the SWP Fixture back box to seal off the junction box. Installation is complete.

